

AGP-4400

ExpressParc®


Exit Pay Credit Card System




Amano Cincinnati, Inc.'s AGP-4400 ExpressParc® Exit Pay Credit Card System accepts entry tickets and validation coupons, calculates parking fees, accepts and processes credit cards, prints and issues receipts. This unit, which interfaces with an on-line credit card host PC for fee calculation and credit card processing, is extremely cost efficient because it reduces the need for cashiers, allowing for effective employee utilization. The need for inventoried parts and service training is greatly reduced because the ExpressParc uses common hardware components.

ExpressParc®

AGP-4400

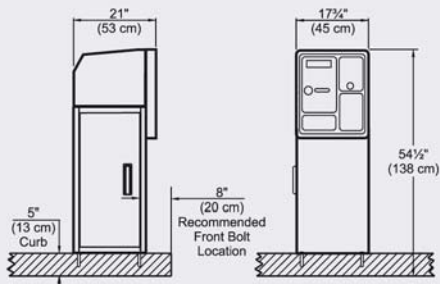

BOLT LAYOUT

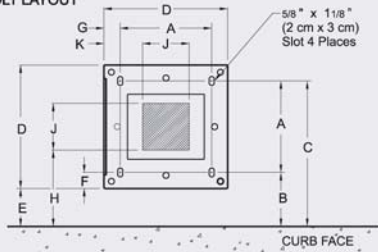

CONFINED RIGID CONDUIT NO MORE THAN 2" (5 cm) HIGH IN THIS AREA.

- A = 11 3/4" (30 cm)
- *B = 8" (20 cm)
- *C = 19 3/4" (50 cm)
- D = 17 3/4" (45 cm)
- *E = 5" (13 cm)
- F = 3" (8 cm)
- G = 3" (8 cm)
- *H = 10 5/8" (27 cm)
- J = 6" (15 cm)
- K = 5 7/8" (15 cm)

* RECOMMENDATION ONLY. INSTALLATION REQUIREMENTS MAY VARY.

FEATURES

- Increased throughput provides rapid exit from your facility**
- Increased exit lanes with no added labor costs**
- Real time authorization or batch processing**
- Secure — no cash collected, no cash available**
- Large selection of financial processors supported**
- Built-in intercom**

SPECIFICATIONS

COMPLIANCE

CISP (Cardholder Information Security Program) compliant, validated by VISA. AGP-4400 ExpressParc® does not store credit card data. Meets ADA (Americans with Disabilities Act) and ANSI (American National Standards Institute) requirements.

ELECTRICAL

120 VAC, 60 HZ
220/240 VAC, 50/60 Hz
10 amp max. (120V) 5 amp max. (240V)
Multiple I/O capability for ticket tracking, count and monitoring

MECHANICAL

Automatic dual ticket feed; dot matrix printer; cartridge ribbon; exclusive RWPV™ (read, write, print and vault) mag-stripe mechanism

TIME CONTROL

Real-time clock synchronization with host computer
Built-in crystal controlled perpetual calendar
Programmable Daylight Saving Time adjustment

ENVIRONMENT

Temperature: -20°F ~ 120°F (-29°C ~ 49°C)
Automatic thermostat-controlled heater included
Humidity: 10% ~ 95% (non-condensing)

HOUSING

Heavy-duty, 12-gauge steel construction, weather gasketing, polyethylene cover, lockable door
Dimensions: 49-1/2"H x 17-3/4"W x 21"D (125 cm x 45 cm x 53 cm)
Ticket throat: 38-3/4" (98 cm)
Weight: 135 lbs. (61 kg)
Finish (Standard): Yellow (RAL #1028); White (RAL #9010)

PRINTER

Prints credit card type receipt (entry date and time, exit date and time, parking fee, card type, partial card number, transaction number)

TICKETS

Uses fanfold tickets: 5,000 tickets/carton
Credit card size tickets: 2-1/8" x 3-3/8" (5.41 cm x 8.59 cm)
Holds 1,000 used tickets in vault; holds 5,000 receipts

COMMUNICATIONS

Interfaces with an on-line credit card host PC for calculation and credit card processing

OPTIONS

2nd I/O Rack (passcard reader lockout)
Access card acceptance capability with model AGP-4430 series ExpressParc

Manufactured by Amano Cincinnati, Inc.'s Ohio factory, an ISO 9001:2000 registered facility. Specifications are approximate and are subject to change without notice. UL approval does not apply to 220/240V AC, 50/60 Hz



REPRESENTED BY:

AMANO®

140 Harrison Avenue, Roseland, NJ 07068-1239
(800) 526-2559 www.amano.com